



Metall Ausführungen

Metal finishes

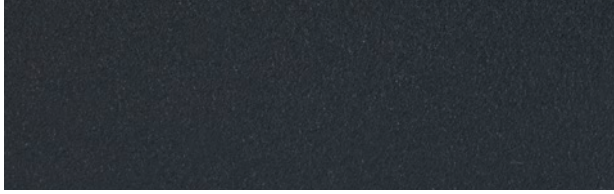


S21 - Farbe RAL 7021 - pulverbeschichtet Anthrazit
S21 - colour RAL 7021 - powder coated anthracite

Gestelle: Kufe (03), Aludrehbar (08)
Bases: slides (03), rotary base in aluminium (08)

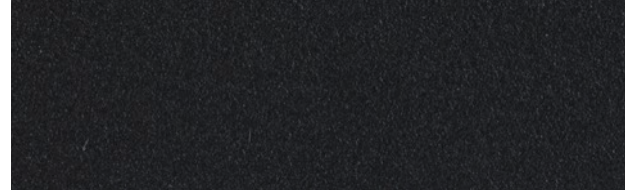

S25 - Farbe RAL 9005 pulverbeschichtet Schwarz
S25 - colour RAL 9005 - powder coated black

Gestelle: Kufe (03), Drehbar in Metall (09)
Bases: slides (03), rotary base in metal (09)

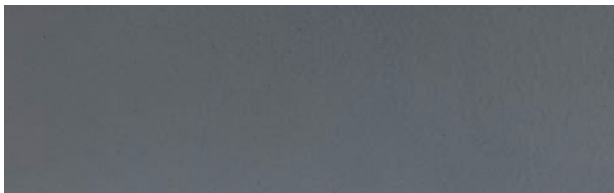

S08 - pulverbeschichtet Edelstahl
S08 - powder coated Stainless steel

Gestelle: Kufe (03), Aludrehbar (08)
Bases: slides (03), rotary base in aluminium (08)



S01 - Edelstahl geschliffen
S05 - stainless steel brushed

Gestelle: Freischwinger (05)(07) , Kufe (03) - nicht in allen Modellen verfügbar gemäß Typenlisten
Bases: Cantilever (05)(07) , Slides (03) - not in all models available according to the specification

Norme des Stoffes Fabric Norms

Test	Skala/scale	Norm
Scheuertouren	Martindale	EN ISO 12947-2
Martindale cycles	rubs martindale	EN ISO 12947-2
Lichtechtheit	Skala 1-8, max. 8	EN ISO 105-B02
Fastness to light	scale 1-8, max. 8	EN ISO 105-B02
Reibebeständigkeit	Skala 1-5, max. 5 nass/trocken	EN ISO 105x12
Rubbing	scale 1-5, maxi. 5 wet/dry	EN ISO 105x12
Pilling	Skala 1-5, max. 5	EN ISO 12945-2
Pilling	scale 1-5, max. 5	EN ISO 12945-2